



EMEA Dual Gang Mounting Plate Installation Instructions

460946001A • December 2005

Copyright © 2005, GE Security Inc.

Product Overview

The EMEA/dual gang mounting plate can be used with single gang European or Asian electrical boxes, single or double U.S. electrical boxes, as well as solid surface/wall mounting.

Ordering Options

521226001	Gray
521227001	Charcoal
521228001	Black


Mounting

1. Determine the mounting scheme:
 - For a single gang European or Asian electrical box, use the 52 or 60 mm spaced slots and appropriate size

metric screws (installer supplied). Use any of the mounting slots for surface or wall mounting.

- For a single or double gang U.S. electrical box, use the #6-32 x .75 long machine screws provided.
2. If needed for surface mounting wiring, remove the appropriate break-away cutout on the side of the plate, using pliers. Mount the plate to the electrical box or wall.
 3. Separate the reader cover from the base.
 4. Connect the reader cable to the installation wiring. Refer to your reader installation manual for connection details.
 5. Mount the reader base to the plate using the four #6-20 thread cutting screws provided.
 6. Mount the reader cover to the base. Refer to your reader installation manual for the proper mounting procedure.

Figure 1. EMEA Dual Gang mounting plate

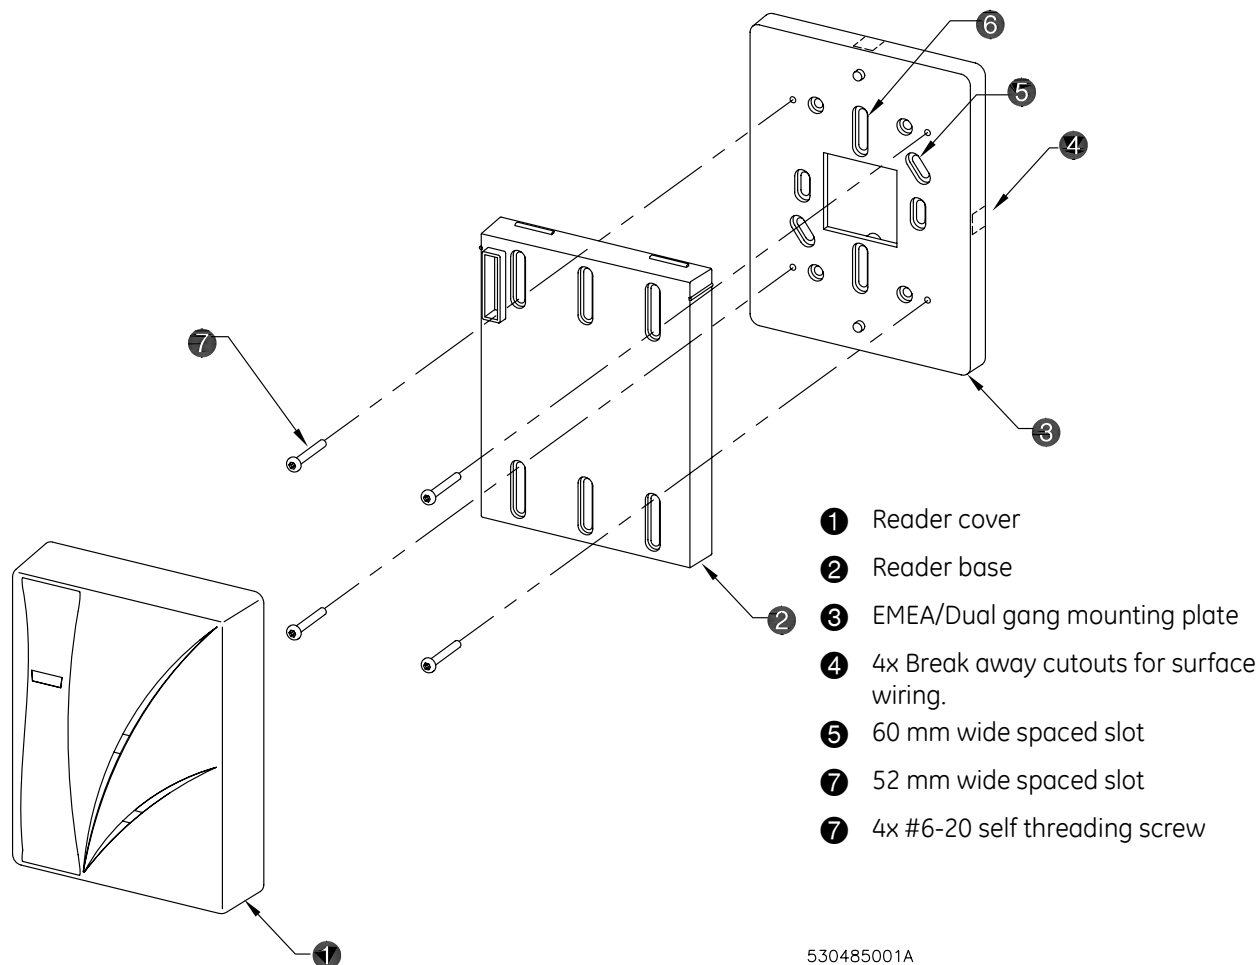

530485001A

GE
Security

U.S.

T 888 GE SECURITY (1 888 437 3287)

F 561 998 6224

Asia

T 852 2907 8108

F 852 2142 5063

Australia

T 61 3 9259 4700

F 61 3 9259 4799

Europe

T 32 2 725 11 20

F 32 2 721 86-13

Latin America

T 305 593 4301

F 305 267 4300

www.gesecurity.com

© 2005 General Electric Company

All Rights Reserved.